

Data Sheet



**Brackish Water
Reverse Osmosis (RO) Membranes**

LG BW 400 R G2

Highest rejection membrane equipped with fouling tolerant low dP spacer technology.

Overview


LG Chem's NanoH2O™ brackish water RO membranes serve various municipal, industrial and commercial applications. Incorporating LG Chem's proprietary Thin Film Nanocomposite (TFN) technology, all LG BWRO membranes deliver reliable and superior performance with intrinsic anti-fouling properties.

LG BW 400 R G2 membrane elements deliver the highest salt rejection and productivity at lower feed pressures with robust membrane chemistry for long-term stable performance. The RO element also incorporates a unique proprietary feed spacer technology for reducing differential pressure. The results are excellent anti-fouling properties and lower cleaning frequency, chemical use, energy consumption, and total cost of plant ownership. Ideal applications include wastewater reuse and feed water sources with high salinity brackish water.

Product Specifications

Active Membrane Area, ft ² (m ²)	Permeate Flow Rate, GPD (m ³ /d)	Stabilized Salt Rejection, %	Minimum Salt Rejection, %	Feed Spacer, Mil
400 (37)	11,500 (43.5)	99.8	99.65	34, low dP

Test Conditions : 2,000 ppm NaCl at 25°C (77°F), 225 psi (15.5 bar), pH 7, Recovery 15%.
Permeate flows for individual elements may vary +/-15%.

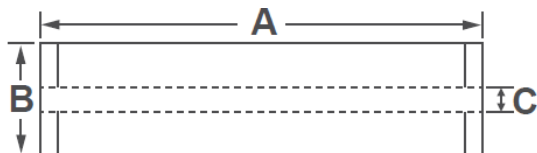

A, mm (in.)	B, mm (in.)	C, mm (in.)	Weight, kg (lbs.)
1,016 (40)	200 (7.9)	28.6 (1.125)	16 (35)

All dimensional information is indicative and for reference purpose only. Please contact LG Chem for detailed technical specification.

Operating Specifications

Max. Applied pressure	600 psi (41 bar)
Max. Chlorine concentration	< 0.1 ppm
Max. Operating temperature	45°C (113°F)
pH Range, Continuous (Cleaning)	2-11 (1-13)
Max. Feedwater turbidity	1.0 NTU
Max. Feedwater SDI (15 mins)	5.0
Max. Feed flow	75 gpm (17 m ³ /h)
Max. Pressure drop (ΔP) for each element	15 psi (1.0 bar)